

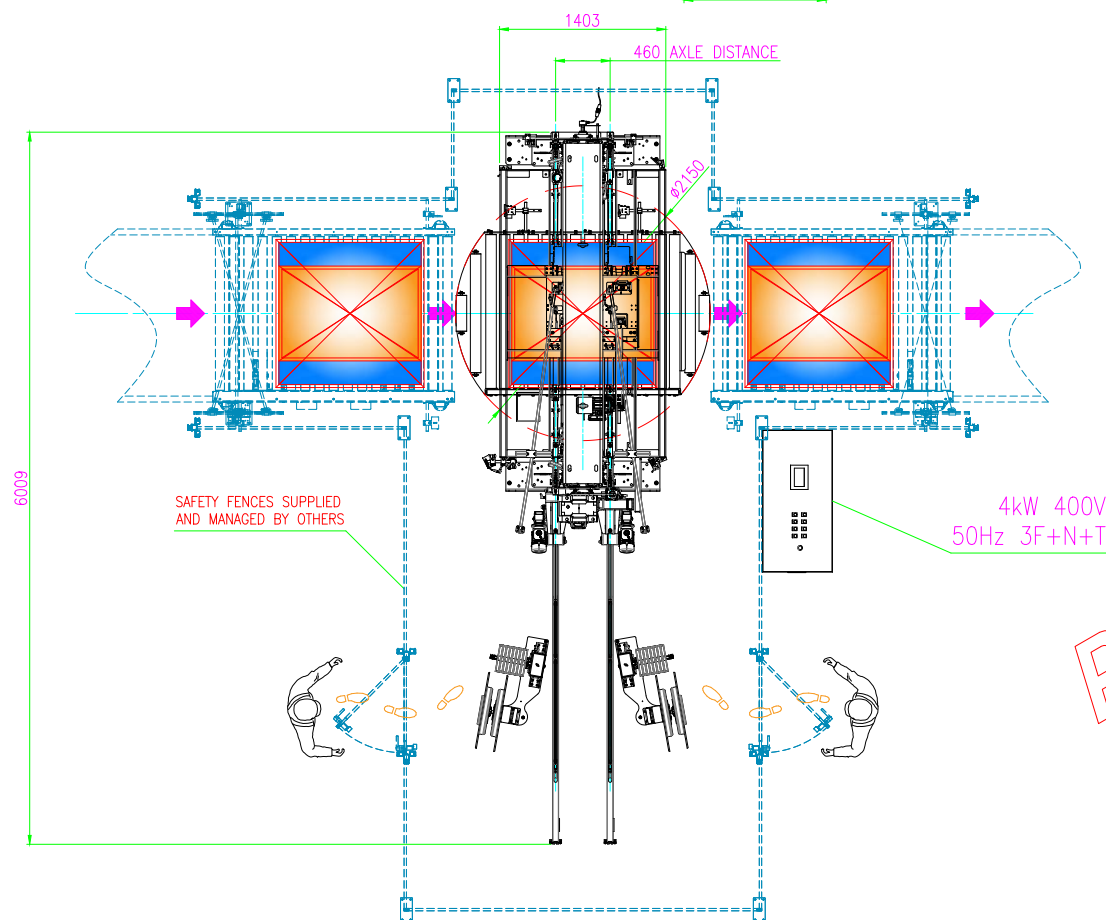
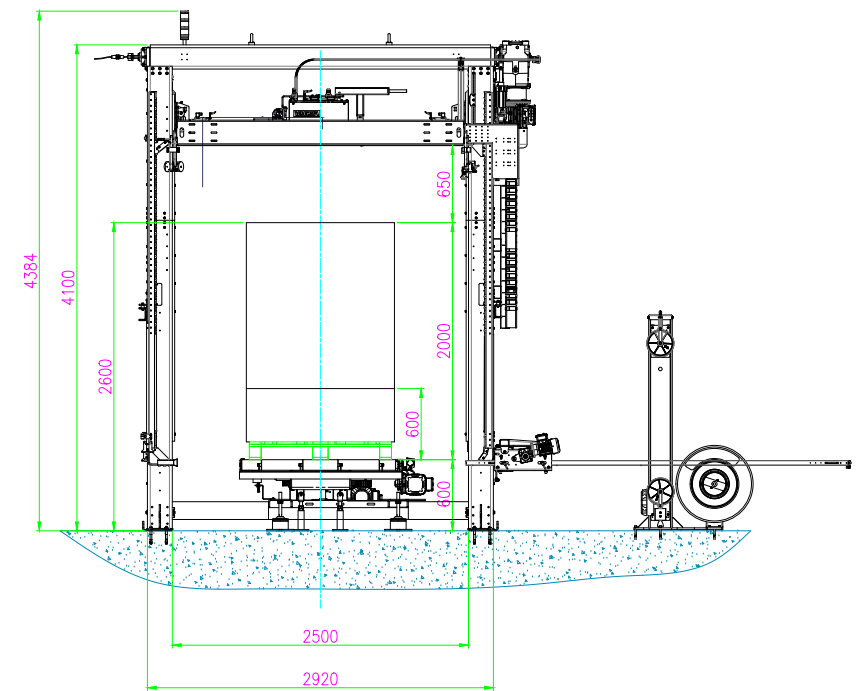
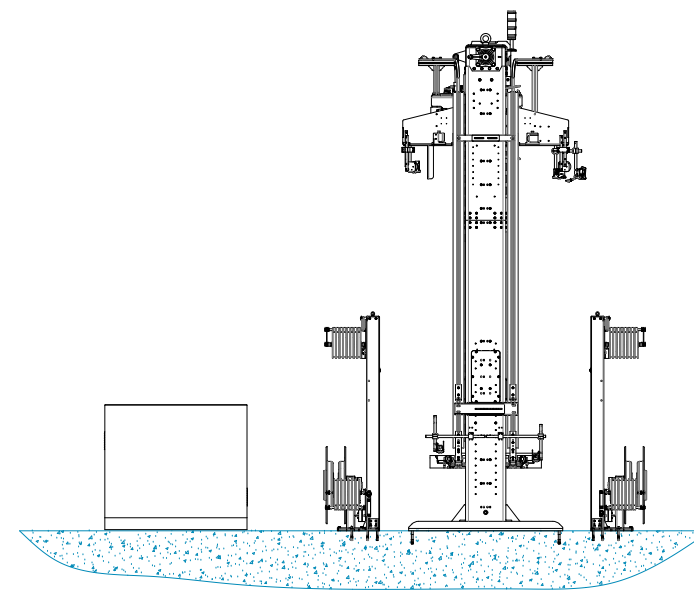
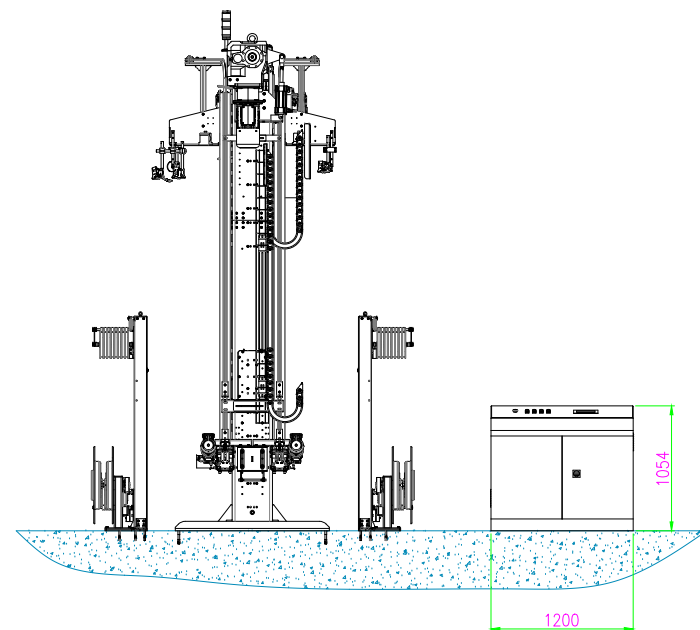


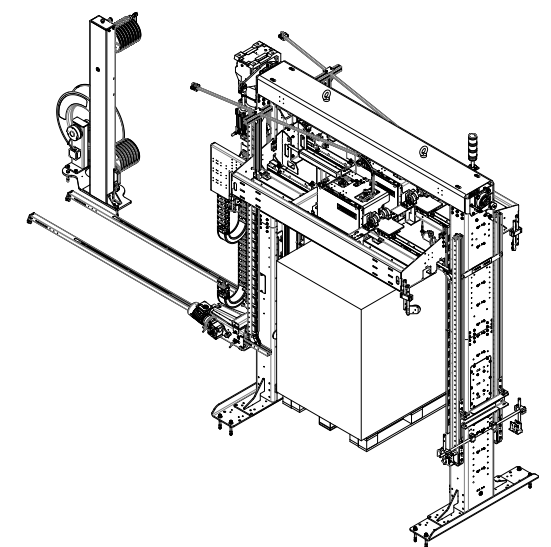


PRELIMINARY ONLY




PHOTOELECTRIC BARRIERS AND SAFETY FENCES ARE SUPPLIED AND MANAGED BY OTHERS TO RESPECT CE NORMS:
DISTANCE FROM MOVING PARTS 1200 mm WITH LIGHT BARRIERS 2 VERTICAL BEAMS
DISTANCE FROM MOVING PARTS 900 mm WITH LIGHT BARRIERS 3 VERTICAL BEAMS

BOBINA REGGIA /
STRAP SPOOL
Spessore / Thickness 0.70mm



POLYESTER STRAPPING (PET)

LATO AVANZAMENTO /
PALLET FRONT LEADING




DIMENSIONI PALLET / PALLET DIMENSIONS

PALLET (LxW) 1200x1200 / 1200x800 mm
PRODUCT (LxW) 1250x1250 / 1150x750 mm
ALTEZZA MAX / HEIGHT MAX. (H) 2000 mm
ALTEZZA MIN / HEIGHT MIN. (H) 600 mm

CARATTERISTICHE TECNICHE / MAIN FEATURES

POTENZA INSTALLATA / INSTALLED POWER 4kW
TENSIONE ALIMENTAZIONE / POWER SUPPLY 400V 50Hz 3F+T+N

DIMENSIONI QUADRO ELETTRICO /
CONTROL CABINET DIMENSIONS

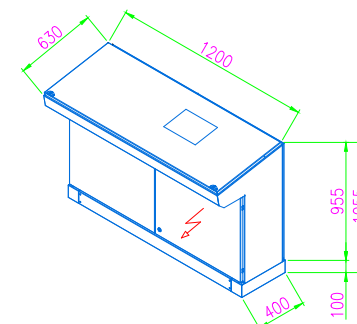

N.	DESCRIZIONE MODIFICA / MODIFY DESCRIPTION	DATA - DATE	FIRMA / SIGNATURE
1			
2			
3			
DATA / DATE 26/10/2023	DISEGNATORE / DESIGNER F.F.	APPROVATO / APPROVED M.T.	SCALA / SCALE —
MACCHINA / MACHINE ANACONDA - S // GT-50			
CLIENTE / CUSTOMER			

ATLANTA
STRETCH

CODICE DISEGNO / DRAWING NUMBER

023_1750